


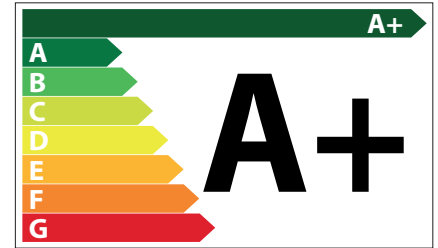

# AQA **F** 6/24


**ENERGY EFFICIENCY**

**Dati tecnici / Technical characteristics / Datos técnicos / Caractéristiques techniques / Technische Merkmale**

Volume di riscaldamento max / Max. heating volume / Volumen de calefacción máx./ Volume de réchauffement max. / Max. Heizvolumen / (35 W/m <sup>3</sup> )	m <sup>3</sup>	670
Peso netto / Net weight / peso neto / Poids net / Nettogewicht	kg	190
Contenuto fluido scambiatore / Fluid contents of the exchanger / Contenido fluido intercambiador / Liquide contenu dans l'échangeur / Gehalt Flüssigkeit im Ausstauscher	l	12
Prevalenza pompa / Pump head / Altura total de elevación de la bomba / Prévalence pompe / förderhöhe Pumpe	m	5
Massima pressione di esercizio / Maximun working pressure / Máxima presión de trabajo / puissance d'exercice max / Max Betriebsdruck	bar	2
Capacità totale serbatoio / Feed box total capacity / Capacidad total depósito / Capacité totale reservoir / Tank-Gesamtkapazität	kg	35
Tensione nominale / Rated voltage / Tensión nominal / Tension nominale / Nennspannung	V	230
Frequenza nominale / Rated input power / Frecuencia nominal / Fréquence nominale / Nennfrequenz	Hz	50
Potenza elettrica nominale / Rated input power / Potencia eléctrica nominal / Puissance électrique nominale / Elektrische	W	350


**Dati di omologazione / Certified Data / Datos de homologación / Données de certification / Daten der Zulassung**

		Max	Min
Potenza termica globale (introdotta) / Global thermal power (Heat input) / Potencia térmica total / Puissance thermique globale / Brennstoffwärmeleistung	kW	25,7	6,9
Potenza termica nominale (utile) / Nominal thermal power (Heat output) / Potencia térmica nominal / Puissance thermique nominale / Nennwärmeleistung	kW	23,5	6,5
Potenza resa all'acqua / Power given back to water / Potencia suministrada al liquido / Puissance rendue à l'eau / Wasserwärmeleistung	kW	19,5	4,5
Potenza resa all'aria / Power given back to air / Potencia suministrada al aire / Puissance rendue à l'air / Raumwärmeleistung	kW	4	2
Consumo orario / Hourly consumption / Consumo horario / Consommation Horaire / Stundenverbrauch	kg/h	5,4	1,4
Rendimento / Efficiency / Rendimiento / Rendement / Wirkungsgrad	%	91,5	94
Emissione media CO (13% O <sub>2</sub> ) / Mean CO emission / Emisión media CO / Emission Moyenne CO / Durchschn CO Emission	%	0,014	
Emissione media CO (13% O <sub>2</sub> ) / Mean CO emission / Emisión media CO / Emission Moyenne CO / Durchschn CO Emission	mg/Nm <sup>3</sup>	171	
Emissione media NOx (13% O <sub>2</sub> ) / Mean NOx emission / Emisión media NOx / Emission Moyenne NOx / Durchschn NOx Emission	mg/Nm <sup>3</sup>	131	
Emissione media OGC (13% O <sub>2</sub> ) / Mean OGC emission / Emisión media OGC / Emission Moyenne OGC / Durchschn OGC Emission	mg/Nm <sup>3</sup>	1	
Emissione media polveri (13% O <sub>2</sub> ) / Mean dust emission / Emisión media polvos / Emission Moyenne poudres / Durchschn Staub Emission	mg/Nm <sup>3</sup>	9	
Temperatura media fumi / Mean flue gas temperature / Temperatura media humos / Température moyenne des fumees / Durchschn	°C	156	
Flusso gas combustibile / Flue gas mass flow rate / Flujo gas combustibile / Flux gaz combustibile / Brenngasfluss	g/s	14,4	
Tiraggio del camino consigliato / Recommended flue pipe draft / Tiro de la chimenea recomendado / Tirage de la cheminée conseillé / Empfohlener zug des Kamins	Pa	12	

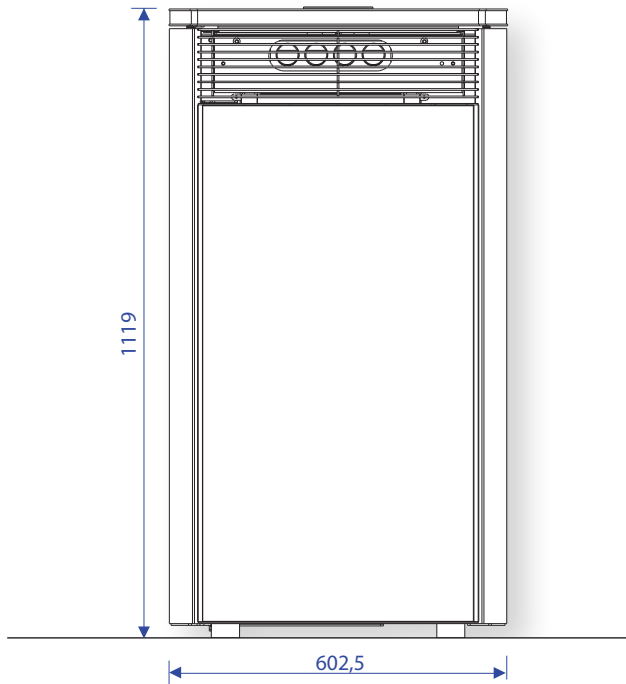
Vista Frontale




Vista Dietro

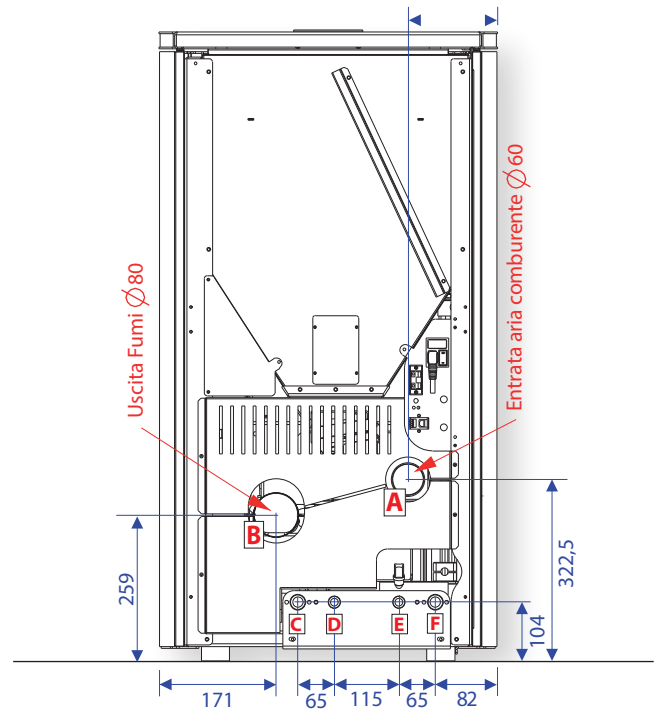

Vista dall'Alto

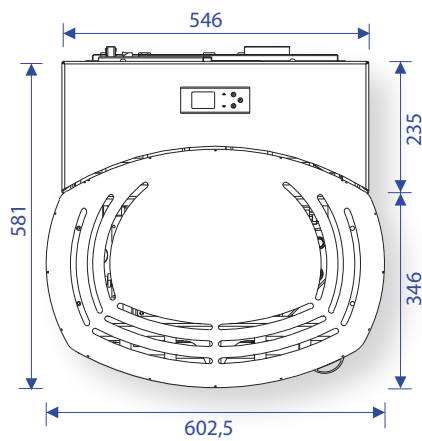

Vista Laterale

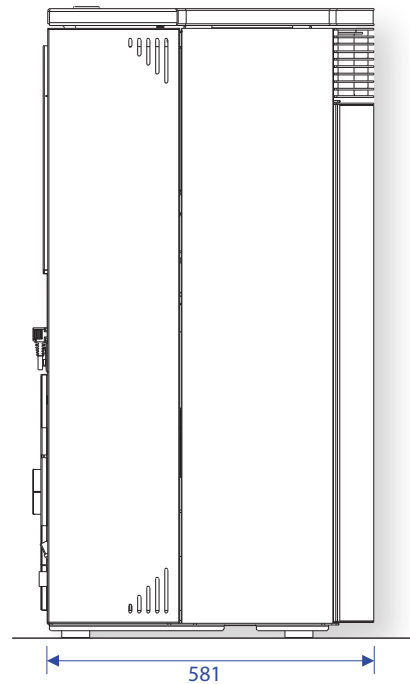

Entrata aria comburente / Air Intake Pipe / Entrada de aire comburente/ Entrée d'air/ Primärlufteinlass	<b>A</b>	Ø 60 mm
Uscita scarico fumi / Exhaust pipe/ Salida de humos/ Sortie de fumées/ Rauchabzug	<b>B</b>	Ø 80 mm
Mandata impianto / Heating Flow / Envío calefacción / Départ chauffage/ Vorlauf	<b>C</b>	3/4"
Ritorno impianto / Heating Return / Retorno calefacción / Retour chauffage/ Rücklauf	<b>F</b>	3/4"
	<b>D</b>	
	<b>E</b>	



+39 0968 926838

+39 0968 926857

+39 0444 440963

FAX +39 0968 926861

+39 0444 440963

ASSISTENZA TECNICA CLIENTI

TECHNICAL SUPPORT / ASISTENCIA TÉCNICA CLIENTES

ASSITANCE TECHNIQUE/ TECHNISCHER SERVICE

+39 0968 96484

UNGARO Srl

Via del Progresso, 51

36054 MONTEBELLO VICENTINO (VI) ITALY

[info@ungarosrl.com](mailto:info@ungarosrl.com)

[www.caldoungaro.it](http://www.caldoungaro.it)